



# DRYWALL REVEAL

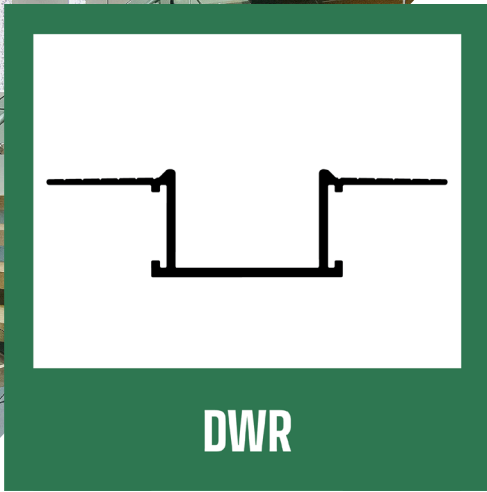

**DWR**

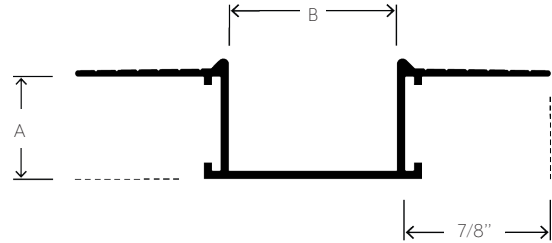

## APPLICATION

Flannery's Drywall Reveals create an aesthetic division between drywall panels on vertical walls and ceilings. Drywall Reveals can be used to create horizontal or vertical lines and can intersect cleanly where desired. Flannery offers many of its Drywall Reveals with Aluminum Alignment Splices to ease the installation process and create crisp and clean butt joints and lines.

## SPECIFICATION

- Standard extruded aluminum alloy 6063 T5
- Typical .050" nominal wall thickness or greater
- Come in 10-foot lengths
- Stocked in Clear Anodized and Mill Finish (for field painting and priming)
- Chem-film, other factory finishes and custom paint are available


PART NO.	"A" DEPTH	"B" WIDTH
DWR 375-375	3/8"	3/8"
DWR 50-125	1/2"	1/8"
DWR 50-25	1/2"	1/4"
DWR 50-375	1/2"	3/8"
DWR 50-50†	1/2"	1/2"
DWR 50-75†	1/2"	3/4"
DWR 50-100†	1/2"	1"
DWR 50-150†	1/2"	1 1/2"
DWR 50-200†	1/2"	2"
DWR 50-300†	1/2"	3"
DWR 50-600†	1/2"	6"
DWR 625-25	5/8"	1/4"
DWR 625-375	5/8"	3/8"
DWR 625-50†	5/8"	1/2"
DWR 625-625†	5/8"	5/8"
DWR 625-75†	5/8"	3/4"
DWR 625-100†	5/8"	1"
DWR 625-150†	5/8"	1 1/2"
DWR 625-200†	5/8"	2"
DWR 625-300†	5/8"	3"
DWR 625-400†	5/8"	4"

† Can be Vented

# DRYWALL REVEAL

## INSTALLATION DETAIL


Attach Drywall Reveals through the taping flange to the drywall and framing with nails, screws or other approved fastening methods. All reveals must be cut accurately and installed with tight, neat joints. Manufacturer recommends that a carbide tip blade along with blade lubricant be used when cutting any aluminum trim. Flannery offers factory cutting of pre-fabricated intersections and corners for all drywall reveals, which can reduce labor costs and waste.

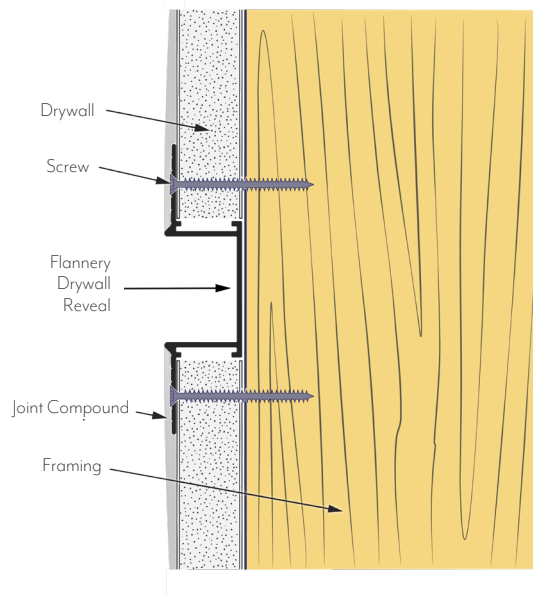


# DRYWALL REVEAL CUSTOM FABRICATION

## CORNERS & INTERSECTIONS


Flannery's factory fabricated intersections and corners for interior trims are manufactured in house and can be made with the same or different moldings. The trims are mitered and then heli-arc welded at the installation flanges, so that every weld will be hidden once the compound joint and finish for the drywall is completed. The standard factory intersection or corner comes with 6" legs from the center point of the reveal, but custom leg lengths can be ordered.




Inside Corner




Outside Corner



4 Way Tee Intersection



3 Way Tee Intersection



90° Intersection

## RADIUS


Radius Shapes are factory curved or bent pieces of material that are necessary when Drywall Reveal trim runs along a "curved" or "radiused" plane. Radiused material is bent to a project's dimensional requirements and is considered a custom product.

Here are some things you should consider when ordering Drywall Reveal Radius:

- Radius Shapes are formed from 10' pieces of material. Usually, only 9' of that material will be usable for installation due to machining marks.
- Radius Order Forms can be downloaded at [flannerytrim.com](http://flannerytrim.com).

When placing an order for radius with Flannery, please indicate the following:

1. Product Type (product code and finish required).
2. Direction of Bend (Inside Curve, Outside Curve, Arch, or Reverse Arch).
3. Size of Radius (in inches or feet).
4. Point of Measurement (the point on the trim where the radius is measured to).
5. Quantity of Pieces Required.

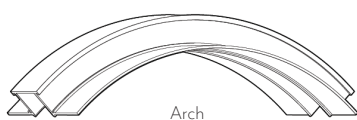

Arch



Curves - Inside/Outside



Reverse Arch

# SPECIFICATIONS FOR DRYWALL TRIMS

## PRODUCT SPECIFICATIONS

Flannery recommends that any installer of Aluminum Drywall Trims properly layout and coordinate the install of trims along with the drywall or gypsum board panels that will be utilized in a given installation. Most Aluminum Drywall Trims are installed after the drywall has been hung, which makes installation planning so paramount in reducing labor costs and ensuring the desired design aesthetic.

## INSTALLATION INSTRUCTIONS FOR INTERIOR MOLDING

1. Moldings with tapeable flanges are to be installed after the drywall/gypsum board has been installed. The installer must provide space for the moldings at the time of drywall/gypsum board installation or cut the drywall/gypsum board with a router. (Moldings without tapeable flanges are to be installed prior to the drywall/gypsum board being installed.)
2. The framing should provide a backer so that moldings can be attached with #6 drywall screws 16" on center.
3. Before the taping process begins, installation flanges should be cleaned. If veneer plaster is specified, the installation flanges must be treated with a bonding agent. Reveals should be masked to prevent compound joint, drywall mud or texture overspray from entering the reveal opening.
4. Painted aluminum moldings should be masked with vinyl tape. Use cloth or vinyl tape specifically manufactured for masking anodized aluminum trims.
5. Drywall tape should not overlap the edge of the reveal. An 8" wide trowel should be used to apply the final skim coat.
6. Fiberglass or self-adhesive drywall tape will shorten taping time and assist in the prevention of possible cracking.

## DRYWALL TRIM ALLOY & COMPOSITION

Flannery's Aluminum Drywall Trims are standard extruded aluminum alloy 6063 T5 and have a typical .050" nominal wall thickness. Aluminum Drywall Trims are aesthetic trims which are not intended to hold or support the weight of any gypsum panel system.

Aluminum Drywall Trims come in 10' lengths and shall have a standard Mill Finish (for field priming & painting) or Clear Anodized Finish. Custom anodizing, Chem-Film finish, factory priming and/or painting and polishing is also available. See our factory finishes page for more details.

# GENERAL SPECIFICATIONS FOR FLANNERY TRIMS

## PRODUCT SPECIFICATIONS

Flannery recommends that any installer of our Aluminum Trims properly layout and coordinate the installation of trims along with materials that will be utilized in the installation of the exterior wall system.

## FLANNERY ALUMINUM TRIM ALLOY & COMPOSITION

Flannery's Aluminum Trims are standard extruded aluminum alloy 6063 T5 and have a typical .050" or greater nominal wall thickness. Extruded Aluminum Trims are aesthetic trims which are not intended to hold or support the full weight of any Panel, Stucco, or Plaster system. Flannery's Trims meet or exceed ASTM B221 for extruded aluminum products.

Flannery's Aluminum Trims come in 10' lengths typically and shall have a standard stock finish of Mill Finish (for field priming & painting) or Clear Anodized (some may be stocked in Black Anodized). Other factory finishes including liquid or powder coated paint, Chem-Film, Primer and special Anodizing finishes are available. All of our other finishing options can be viewed on the next page.

## HANDLING ALUMINUM TRIMS

Personal protection equipment should be utilized when handling and installing aluminum trims. Gloves and eye protection must be worn when handling aluminum trims as well as ear protection when cutting.

## CUTTING ALUMINUM MOLDINGS

Flannery recommends that ten-foot lengths be used wherever possible. Aluminum Moldings can be cut with a chop saw, using a 125-150-tooth carbide-tip blade for non-ferrous metal. An abrasive cut-off wheel should not be used to cut aluminum trims. Blade lubricant (WD-40 or grease stick) must be applied to the blade before each cut. Lubricant should be cleaned from the trim prior to installation.

## STEPS FOR FIELD PAINTING MILL FINISH (RAW) ALUMINUM MOLDINGS

1. Clean and treat moldings in accordance with the paint manufacturer's specifications.
2. Use a primer recommended by the paint manufacturer's specifications.
3. Apply the paint coat according to the paint manufacturer's specifications.
4. Flannery makes no guarantees, nor accepts any responsibility, for the performance of field-applied coatings over anodized finishes.
5. If aluminum trim has an alternate finish, contact Flannery for field painting instructions.


## PLEASE NOTE

*This product sheet presents general guidelines and suggestions for the installation of Flannery trims and products. The purpose of these general guidelines and suggestions is to aid in a successful interior or exterior finish based on the Uniform Building Code and industry standards. No one catalog or product guide can address all of the unique specifics or installation details that occur from one project to another. Flannery recommends that every installer be familiar, or become acquainted with, common interior or exterior trim installation practices before installing any of Flannery's many trims and products. Flannery also recommends that the specifying architect, engineer, and general contractor be consulted with as well.*

# DRYWALL TRIM ACCESSORIES


## ALIGNMENT SPLICES

Many of Flannery's Drywall Trims are available with Aluminum Alignment Splices. Straight Splices are free of charge and are available upon request. Straight Splices assist the installer in aligning and joining aluminum drywall trims together along a straight plane. Installers who cut their own miters in the field can use our Special Corner Splices and 90° Intersection Splices to bring the cut pieces together for a tight and clean miter joint.

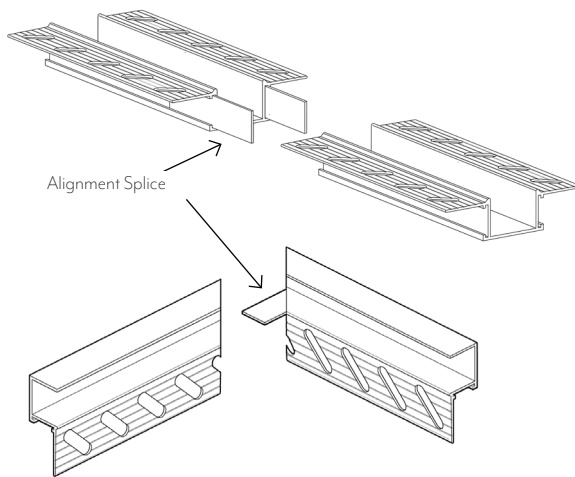

## TAPEABLE END CAPS

Flannery's Tapeable End Caps come with a taping flange and hook to the end of a reveal with two special aluminum splices to ensure a clean termination point (no glue required). The Tapeable End Cap is perfect for when a Drywall Reveal terminates in the middle of a horizontal wall or gypsum board ceiling when the end of the reveal needs to be finished to the drywall.

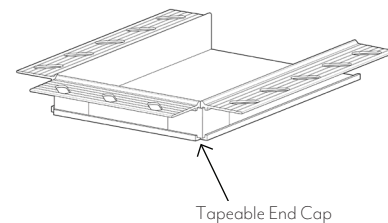

## STANDARD END CAPS

Flannery's Standard End Caps are a U or L-Shaped piece of aluminum that slide onto the end of various Aluminum Drywall Trims that have their run terminated by a dissimilar material such as a door or window frame.

